

BLUE PUCK BUZZ QUUPPA QUUPPA

AOA RTLS beacon with buzzer

BENEFITS

- Location high accuracy <1m
- Ultra compact
- High lifecycle: up to 20 years
- Pick to light : Integrated LED
- IP65 waterproof
- Integrated NFC chipset





TECHNICAL SPECIFICATIONS

OPERATING MODE

Frequency 2.4 GHz - Bluetooth + 2 proprietary channels (2401MHz &

2481MHz)

Output power Up to +4 dBm (configurable)

Range Up to 500 meters in open field (+4dBm)

Transmission period Smart battery management:

Static state: Transmit period: 1 to 10 sec, or standby

Moving state: Transmit period: 0.1 to 1 sec

Radio frame format Location packet + data packet (13 Bytes)*

*Refer to the frames specification for more information.

Settings and configuration Interface/protocol: NFC (Type 2)

Operating mode Data periodic transmission by motion detection (QUUPPA

protocol) Commands:

- LED indicator (ON / OFF)

- Buzzer (ON/OFF)

- Battery level

Sensor performance Location accuracy: 10 cm to 1m

3-axis accelerometer for moving event detection (battery life

extension)

Range: -8g to 8g Resolution: 32 mg



BATTERY

Power supply 3 VDC – Internal lithium battery

Battery life Up to 20 years*

*Refer to the battery life curves for more information.

Battery level Low battery warning from 15%

CERTIFICATIONS

Europe CE: EN 300 328/EN 300 330, EN 301 489, EN 62311, EN 62368

USA FCC : FCC PART 15
Canada ISED : RSS-247/ICES-003

RoHS Yes Quuppa Approved Yes

HOUSING

Dimensions Ø 57 mm base - height: 20 mm

Weight 41g

Materials DELRIN (POM C)

Waterproof grade IP 65

Operating temperature -30°C to +70°C

ACCESSORIES

Tag support Holder + double-sided adhesive:


PUCK HOLDER STICKER (ACIOM118B)

Holder only:

PUCK HOLDER (ACIOM117B) **Double-sided adhesive only:**PUCK STICKER (ACIOM188)

3M PT1100 - Ø 55mm - Thickness: 1,1mm

MECHANICAL DRAWINGS

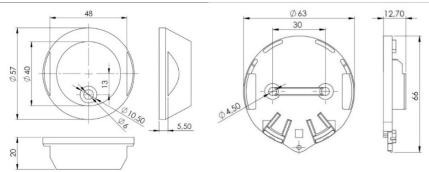

BLUE PUCK BUZZ QUUPPA

BLUE PUCK HOLDER